


548240

Vikan Wet Scrub, Klettbezug, 40 cm, Grau

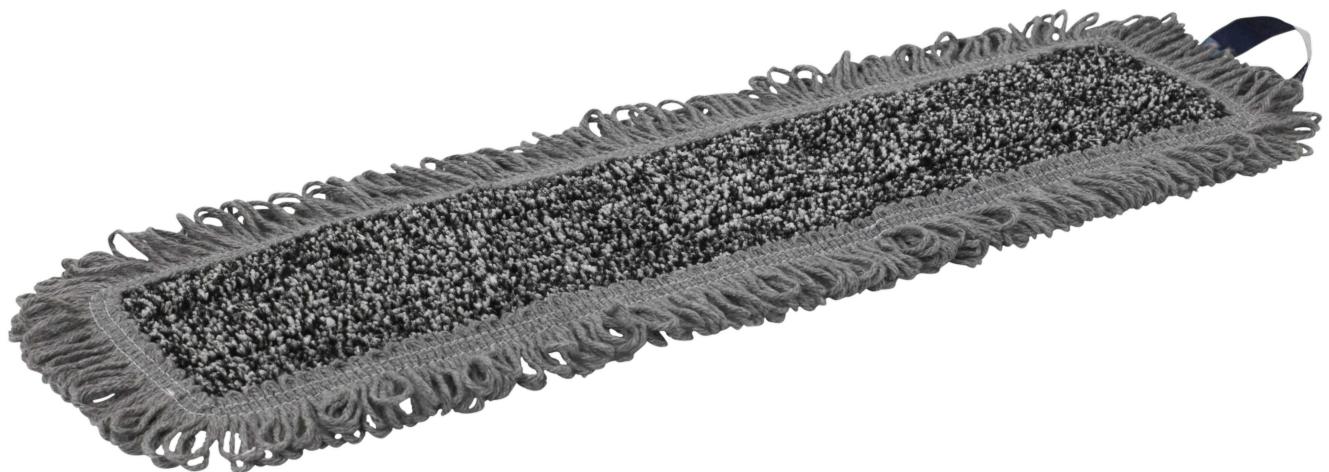

Der Moppbezug Wet Scrub von Vikan entfernt mühelos hartnäckige Verschmutzungen, Flecken und Kratzer von rutschfesten Böden.

Technische Daten

Artikelnummer	548240
System Grösse	40 cm
Material	60% Polyamide 40% Polyester
Entspricht (EG) 1935/2004 über Lebensmittelkontaktmaterialien¹	Nein
FDA konforme Rohstoffe (CFR 21)	Nein
VE	5 Stk.
Anzahl je Palette (80 x 120 x 200 cm)	1350 Stk.
Quantity Per Layer (Pallet)	150 Stk.
Colli Länge	520 mm
Colli Breite	150 mm
Colli Höhe	50 mm
Länge	470 mm
Breite	120 mm
Höhe	10 mm
Nettogewicht	0,08 kg
Tare cardboard	0,01 kg
Tare total	0,01 kg
Bruttogewicht	0,09 kg.
Kubikmeter	0,000564 M3
Max. Trocknungstemperatur	55 °C
TemperatureMachineWashing	40 °Celsius
GTIN-13 Nummer	5705025482408
GTIN-14 Nummer (Kartonanzahl)	15705025482405
Zolltarif	63071090
Ursprungsland	Estonia

Waschen Sie das Produkt sofort nach Gebrauch - um zu verhindern, dass sich Schmutz ansammelt, sowie Schimmel- und Geruchsbildung.

Die erste Wäsche sollte bei mindestens 60 ° C und separat durchgeführt werden, um Fleckenbildung zu vermeiden

Tücher und Mopps verschiedener Typen separat waschen, um Kreuzkontaminationen zu vermeiden

Mit lauwarmem Wasser ohne Zusatz von Chemikalien spülen / waschen - um chemische Rückstände aus der Reinigung zu entfernen, die das Textil bei höheren Temperaturen beeinträchtigen können.

Trocken oder nass verwenden

Empfohlene Benetzung 175 % des Produktgewichts

Vikan - scrub



Wet Scrub Mop

Article	Article no.	Size	Recommended frame or holder		
25 cm	548225	150x330 mm			
40 cm	548240	150x520 mm			
60 cm	548260	150x680 mm			
Pocket mop	548200	150x480 mm	Vikan composite frame 374218 with exchangeable hooks 376312		
Traceability	First 4 numbers describes the construction and the last numbers indicates the model of the product. Batch number indicates when the product is manufactured, refering to this Vikan can trace the production and take action if necessary.				
Packed	5 pcs. in a plastic bag - 50 pcs. in a carton.				
CLEANING					
Where to use:	On the safety flooring and other stuctured surfaces in entrances and toilets. Should <u>not</u> be used on wooden or untreated linoleum flooring.				
How to use:	Preferably used in Vikan® system. A damp mop is picked up with the frame - scrub on spots and ingrained dirt - use recommended cleaning agents if necessary. Training is organized by Vikan. Contact our sales organization for further information or set up a meeting.				
Optimum	185%	to achieve best cleaning efficiency and scope			
Preparation:	Use only water, directly in the washing machine with controlled spin-drying process or by using Vikan® preparation lid and box. In case of using cleaning agents we definitely recommend impregnation in lid and box for lowest chemical use.				
Article	Dry prel. weight ± 5 g	ml water	Damp weight ± 15 g		
25 cm	55	102	157		
40 cm	88	163	251		
60 cm	108	200	308		
Pocket mop	100	185	285		
CARE					
Care label					
Care label describes the maximum temperature that should be used. Due to cost, time and environmental impact a reduced temperature should always be evaluated depending on the application.					
Recommended washing	70°C	Use detergents developed for mops and with a pH less than 10. Softner or biocides should not be used as they can cause fiber damage and specific in combination with high temperature. The electrostatic characteristic that is essential for the dust collecting will be reduced or lost with this type of treatment.			
Washing in specific hygiene use	72-95°C, depending on time				
Drying instruction	Max 55°C	The recommendation is made to avoid the textile to be damaged if humidity is not controlled.			
Disposal after use	Material recovery	The product is pure synthetic with high strength and can be used in many re-circulated materials depending on their			
	Energy recovery	The fibers have a high energy value and can be totally burned without anything else than CO ₂ and water.			
COMPOSITION					
Cleaning surface	60 % Polyamide 40% Polyester	Scrub pad with monofilaments and outer fringe made of absorbent yarn.			
Backing	100 % PA woven loop + 100 % PES conveyor	Long lasting fabric developed for use in damp and demanding conditions.			
CHARACTERISTICS					
Shrinkage	Less than 5% at recommended washing conditions.				
Staining	No staining in dry or damp condition if recommendation is followed. Some staining can be noticed on other textiles when the higher temperature range is used but separate washing of mops and cloths that are of different construction or used for different applications are recommended.				
Developed and manufactured by the Vikan group for professionals.					

